


VIGUETA ALMA ABIERTA 12/64

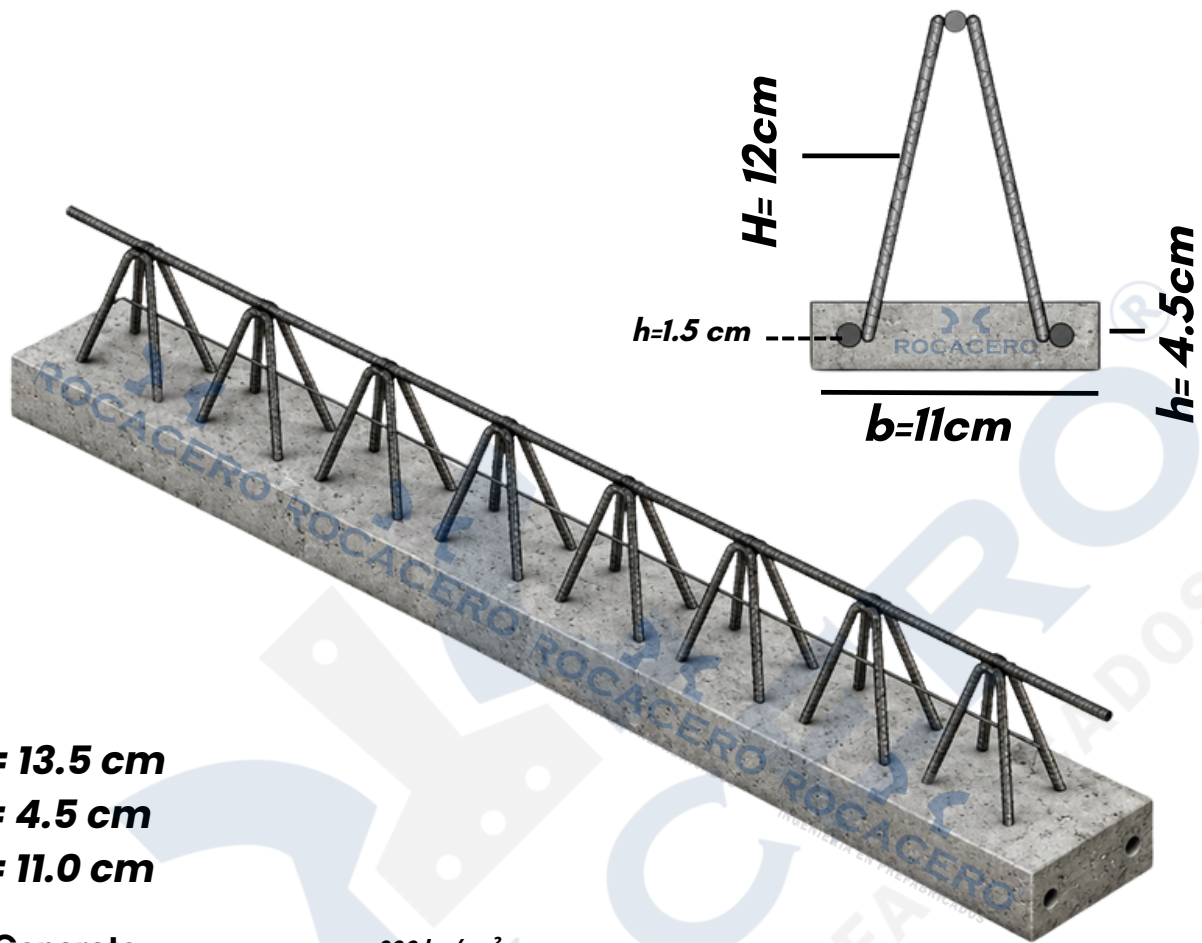

H= 13.5 cm

h= 4.5 cm

b= 11.0 cm

R= Concreto 200 kg/cm²

R= Acero Principal 6,000kg/cm²

R= Acero de Refuerzos 4.200/6.000 kg/cm²

R= Ac. Diag. Presoldados 5,000 kg/cm²

L máx (cm) carga viva de 190kg/m²

ARMADO		BOVEDILLA CONCRETO	BOVEDILLA POLIESTIRENO		
Presoldado	Refuerzo	75 - 25 - 12 / t	75 - 12/ t	70 - 12/t	60 - 12/t
12/64	T-5	390/5	420/5*	440/5*	480/5*
12/64	T-4	350/5	380/5	390/5	430/5*
12/64	T-3	330/5	350/5	370/5	390/5
12/64	T-2	310/5	330/5	340/5	360/5
12/64	T-1	280/5	300/5	310/5	330/5
12/64	T-0	250/5	270/5	280/5	300/5

L máx (cm) carga viva de 250kg/m²

ARMADO		BOVEDILLA CONCRETO	BOVEDILLA POLIESTIRENO		
Presoldado	Refuerzo	75 - 25 - 12/t	75 - 12/ t	70 - 12/t	60 - 12/t
12/64	T-5	440/5*	400/5	410/5*	440/5*
12/64	T-4	340/5	360/5	370/5	390/5
12/64	T-3	320/5	340/5	350/5	370/5
12/64	T-2	290/5	330/5	320/5	350/5
12/64	T-1	260/5	300/5	290/5	310/5
12/64	T-0	240/5	270/5	270/5	