


VIGUETA ALMA ABIERTA 14/36

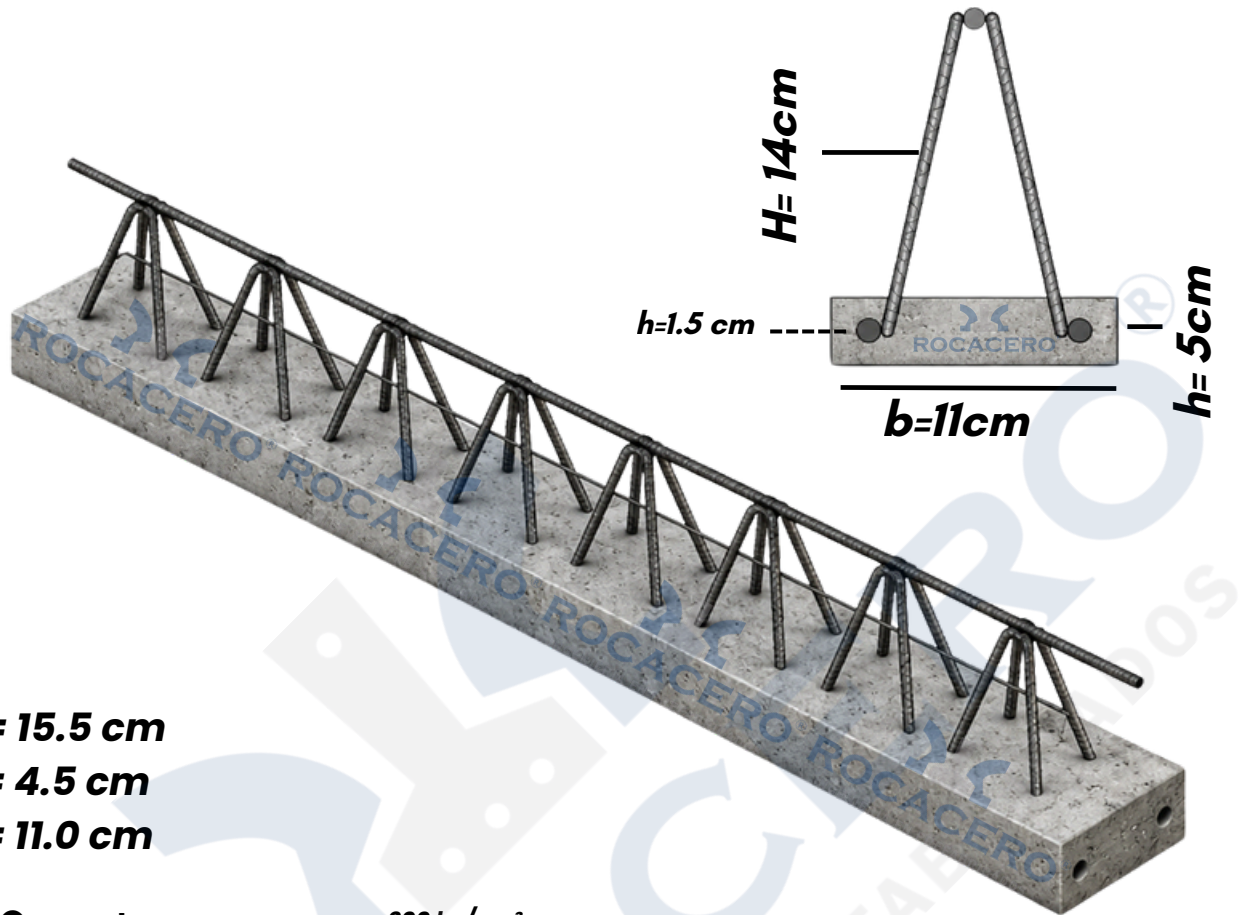

H= 15.5 cm

h= 4.5 cm

b= 11.0 cm

R= Concreto 200 kg/cm²

R= Acero Principal 6,000kg/cm²

R= Acero de Refuerzos 4.200/6.000 kg/cm²

R= Ac. Diag. Presoldados 5,000 kg/cm²

Capacidades de carga viva útil

CARGA kg/m ²	ARMADO Presoldado	Refuerzo	BOVEDILLA CONCRETO		BOVEDILLA POLIESTIRENO		
			75-25-15	75-25-20	75-13	75-15	75-20
170	14/36	-	220	240	220	240	270
170	14/36	2.5	310	340	310	340	370
170	14/36	3	340	380	350	380	410
170	14/36	4	410	460	420	450	500
170	14/36	2 X 3	430	470	225	460	520
170	14/36	2 X 4	480	500	425	500	600*
250	14/36	-	200	230	210	220	250
250	14/36	2.5	290	320	290	320	350
250	14/36	3	320	360	320	350	380
250	14/36	4	380	430	380	420	460
250	14/36	2 X 3	400	430*	400	440	480
250	14/36	2 X 4	420	430*	425	500	520*
350	14/36	-	190	210	190	210	230
350	14/36	2.5	270	300	260	290	320
350	14/36	3	300	330	290	320	520*
350	14/36	4	360	380	350	390	420
350	14/36	2 X 3	360*	380*	370	400	440*
350	14/36	2 X 4	360*	380*	410	420*	440*