


VIGUETA ALMA ABIERTA 17/64

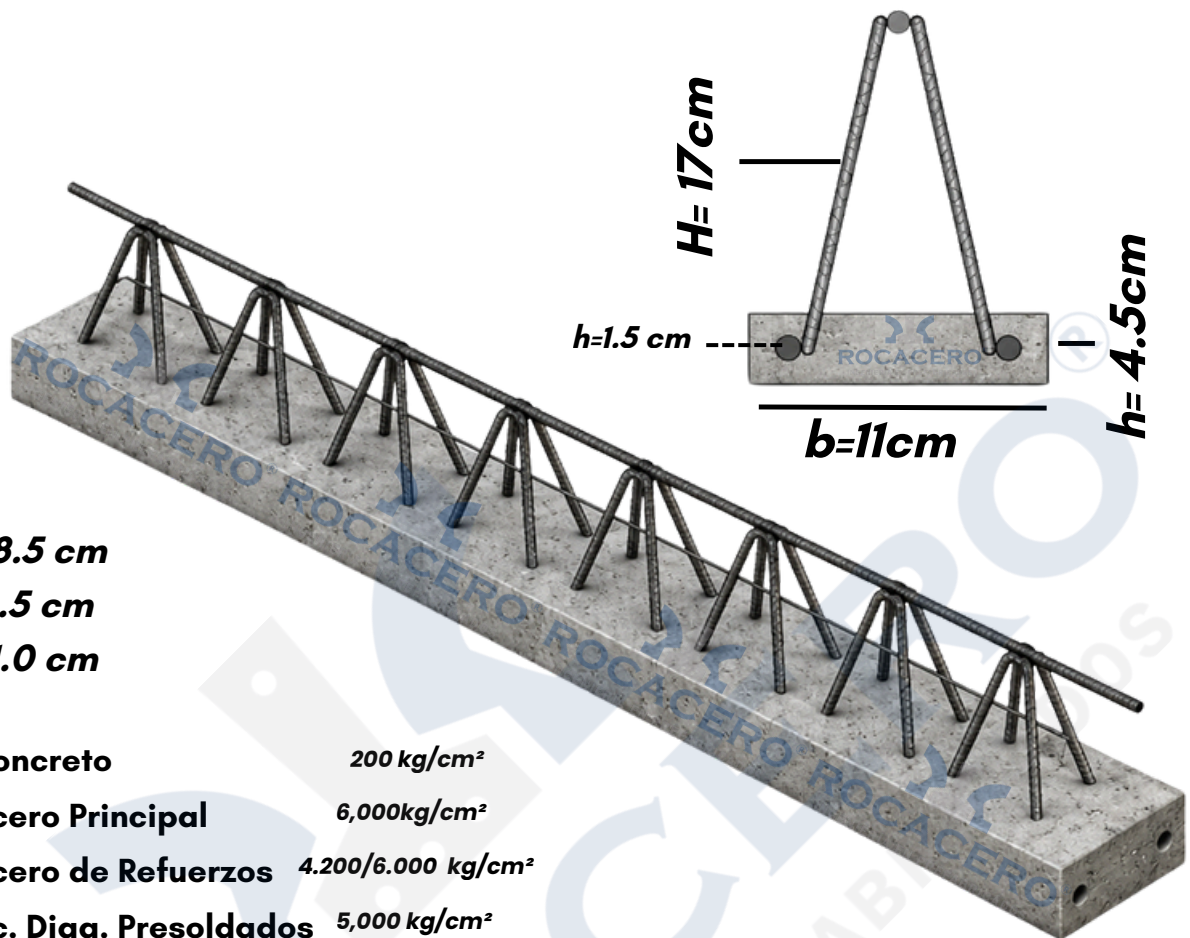

H= 18.5 cm

h= 4.5 cm

b= 11.0 cm

R= Concreto	200 kg/cm²
R= Acero Principal	6,000kg/cm²
R= Acero de Refuerzos	4.200/6.000 kg/cm²
R= Ac. Diag. Presoldados	5,000 kg/cm²

L máx (cm) carga viva de 190kg/m²

ARMADO		BOVEDILLA CONCRETO	BOVEDILLA POLIESTIRENO		
Presoldado	Refuerzo	75 - 25 - 20 / t	75 - 20/ t	70 - 12/t	60 - 12/t
17/64	T-7	610/5	690/6*	710/6*	750/6*
17/64	T-6	540/5	620/5	640/6*	690/6*
17/64	T-5	470/5	550/5	570/5	610/5
17/64	T-4	420/5	470/5*	490/5*	520/5*
17/64	T-3	400/5	450/5	460/5*	490/5*
17/64	T-2	370/5	410/5	430/5	450/5
17/64	T-1	330/5	370/5	380/5	410/5
17/64	T-0	310/5	340/5	360/5	380/5

L máx (cm) carga viva de 250kg/m²

ARMADO		BOVEDILLA CONCRETO	BOVEDILLA POLIESTIRENO		
Presoldado	Refuerzo	75 - 25 - 20/t	75 - 20/ t	70 - 20/t	60 - 20/t
17/64	T-7	440/5*	620/6	670/6*	710/5*
17/64	T-6	340/5	580/5	600/5	650/5
17/64	T-5	320/5	500/5	520/5	570/5
17/64	T-4	290/5	450/5	460/5	490/5
17/64	T-3	260/5	420/5	430/5	470/5
17/64	T-2	240/5	390/5	400/5	430/5
17/64	T-1	290/5	350/5	360/5	390/5
17/64	T-0	260/5	320/5	330/5	360/5