


VIGUETA ALMA ABIERTA 21/64

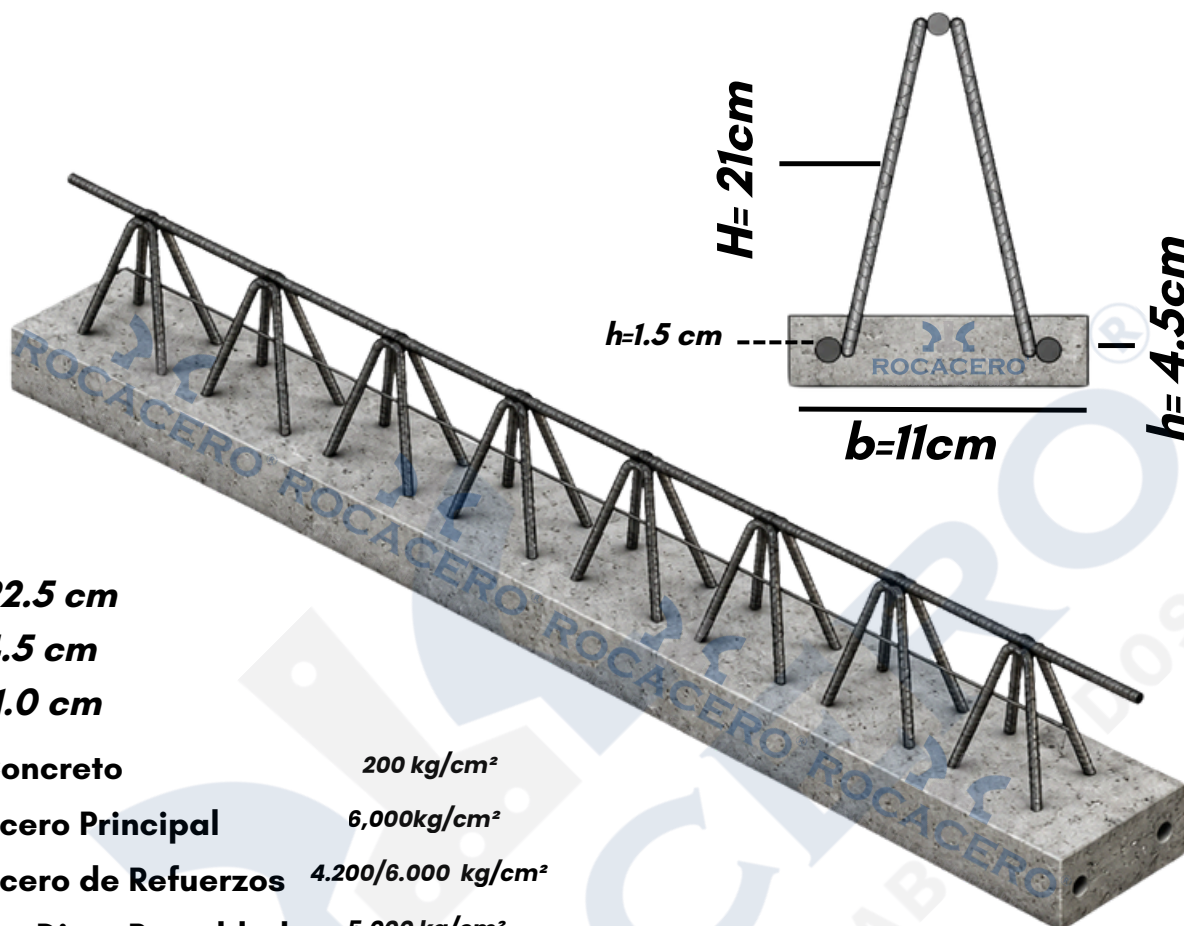

H= 22.5 cm

h= 4.5 cm

b= 11.0 cm

R= Concreto 200 kg/cm²

R= Acero Principal 6,000kg/cm²

R= Acero de Refuerzos 4.200/6.000 kg/cm²

R= Ac. Diag. Presoldados 5,000 kg/cm²

L máx (cm) carga viva de 190kg/m²

ARMADO		BOVEDILLA CONCRETO	BOVEDILLA POLIESTIRENO		
Presoldado	Refuerzo	75 - 25 - 25	75 - 25	75 - 30	60 - 30
24/64	T-7	630	730	790	860
24/64	T-6	570	660	720	790
24/64	T-5	500	570	620	700
24/64	T-4	450	510	550	600
24/64	T-3	420	480	520	570
24/64	T-2	390	440	480	520
24/64	T-1	350	400	430	470
24/64	T-0	320	360	400	440

L máx (cm) carga viva de 250kg/m²

ARMADO		BOVEDILLA CONCRETO	BOVEDILLA POLIESTIRENO		
Presoldado	Refuerzo	75 - 25 - 25	75 - 25	75 - 30	60 - 30
25/64	T-7	610	690	750	820
25/64	T-6	550	620	680	750
25/64	T-5	480	540	580	640
25/64	T-4	430	480	520	570
25/64	T-3	400	450	500	540
25/64	T-2	370	410	460	500
25/64	T-1	330	370	410	450
25/64	T-0	310	340	380	420