


VIGUETA ALMA ABIERTA 25/64

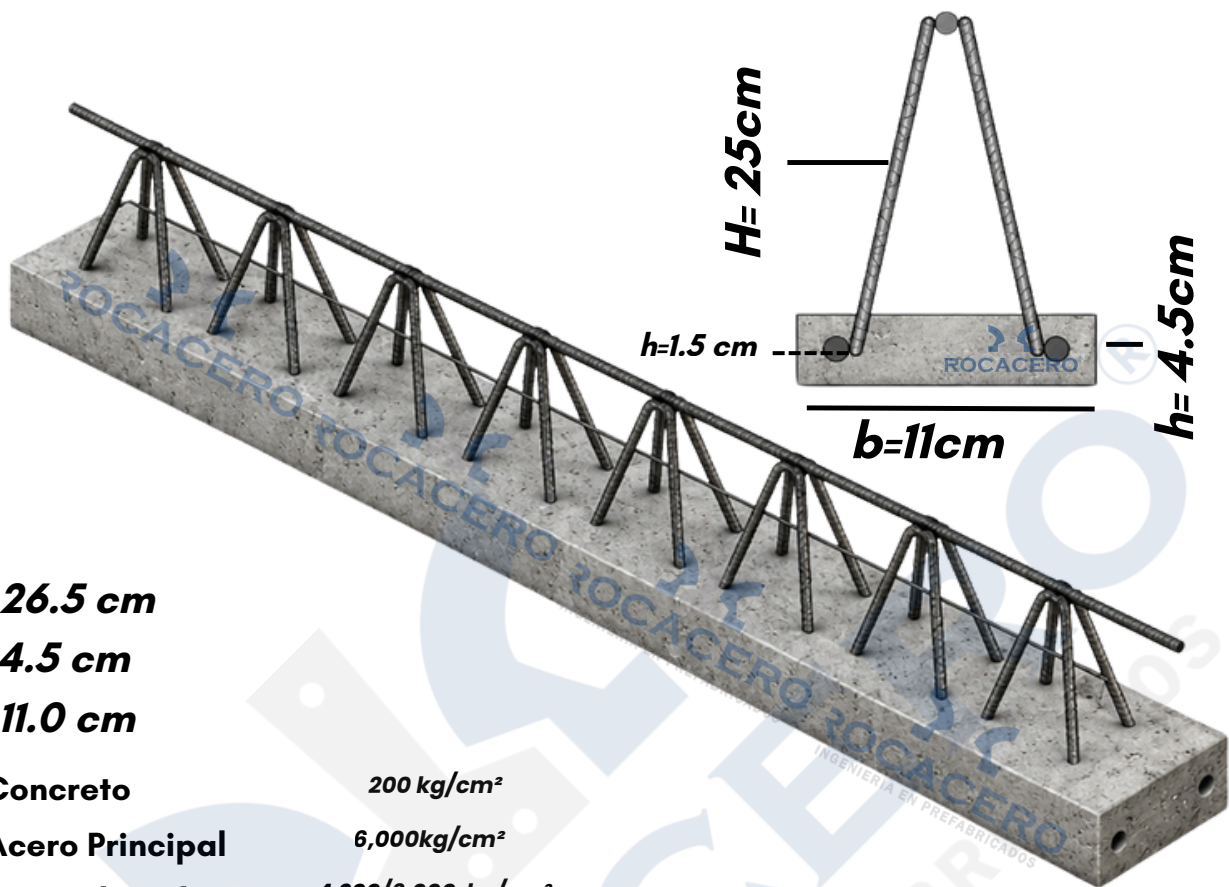

H= 26.5 cm

h= 4.5 cm

b= 11.0 cm

R= Concreto 200 kg/cm²

R= Acero Principal 6,000kg/cm²

R= Acero de Refuerzos 4.200/6.000 kg/cm²

R= Ac. Diag. Presoldados 5,000 kg/cm²

L máx (cm) carga viva de 190kg/m²

ARMADO		BOVEDILLA CONCRETO	BOVEDILLA POLIESTIRENO		
Presoldado	Refuerzo	75 - 25 - 25	75 - 25	75 - 30	60 - 30
25/64	T-7	630/5	730/5*	790/5*	860/5*
25/64	T-6	570/5	660/5*	720/5*	790/5*
25/64	T-5	500/5	570/5	620/5	700/5
25/64	T-4	450/5	510/5	550/5	600/5
25/64	T-3	420/5	480/5	520/5	570/5
25/64	T-2	390/5	440/5	480/5	520/5
25/64	T-1	350/5	400/5	430/5	470/5
25/64	T-0	320/5	360/5	400/5	440/5

L máx (cm) carga viva de 250kg/m²

ARMADO		BOVEDILLA CONCRETO	BOVEDILLA POLIESTIRENO		
Presoldado	Refuerzo	75 - 25 - 25	75 - 25	75 - 30	60 - 30
25/64	T-7	610/6	690/6*	750/6*	820/6*
25/64	T-6	550/6	620/6	680/6*	750/6*
25/64	T-5	480/6	540/6	580/6	640/6*
25/64	T-4	430/5	480/5	520/6	570/6
25/64	T-3	400/5	450/5	500/5	540/6
25/64	T-2	370/5	410/5	460/5	500/5
25/64	T-1	330/5	370/5	410/5	450/5
25/64	T-0	310/5	340/5	380/5	420/5