
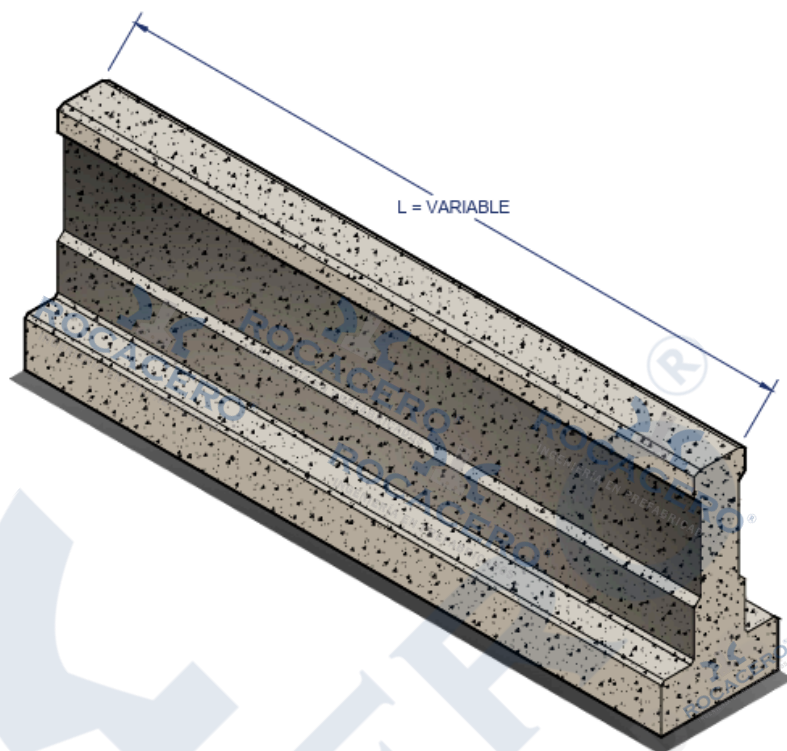


VIGUETA PRETENSADA VT-20

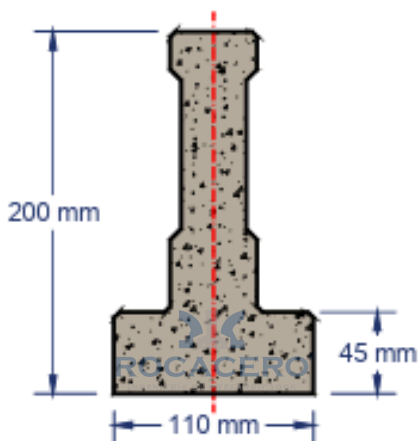

R= Concreto	350 kg/cm ²
R= Acero Principal	17500 kg/cm ²
Peso Lineal	28 kg-m
Área	119 cm
Momento de inercia	4693 cm ⁴
Altura centroide	8.55 cm

<i>Tipo Bovedilla</i>	75-20	75-25
<i>Capa Superior (cm)</i>	6	6
<i>Espesor BV Concreto (cm)</i>	20	25
<i>Separación VT (cm)*</i>	75	75
<i>Tipo de armado</i>	5	5

Claro (m)	Capacidad de carga viva útil (kg/m ²)		No. Puntales
4.5	910	1090	1
5	740	900	2
5.5	610	730	2
6	500	600	2
6.5	400	510	3
7	250	400	3
7.5	170	270	3
8		110	4

<i>Tipo Bovedilla</i>	70-20	70-25	70-35	70-45
<i>Capa Superior (cm)</i>	6	6	6	6
<i>Espesor BV EPS (cm)</i>	20	25	35	45
<i>Separación VT (cm)*</i>	70	70	70	70
<i>Tipo de armado</i>	5	5	5	5

Claro (m)	Capacidad de carga viva útil (kg/m ²)				No. Puntales
4.5	1000	1180	1510	2000	1
5	830	990	1280	1700	2
5.5	700	840	1090	1450	2
6	590	710	930	1240	2
6.5	490	600	790	1050	3
7	360	490	680	900	3
7.5	260	360	530	780	3
8	180	270	400	620	3
8.5	120	180	300	480	4
9		120	220	350	4